

BRIDGEPORT V480 APC

PERFORMANCE VERTICAL
MACHINING CENTER AND
AUTOMATIC PALLET CHANGER





 **HARDINGE**[®]

Bridgeport[®]



BRIDGEPORT V480 APC

PERFORMANCE VERTICAL MACHINING CENTER AND AUTOMATIC PALLET CHANGER

DIMENSIONS

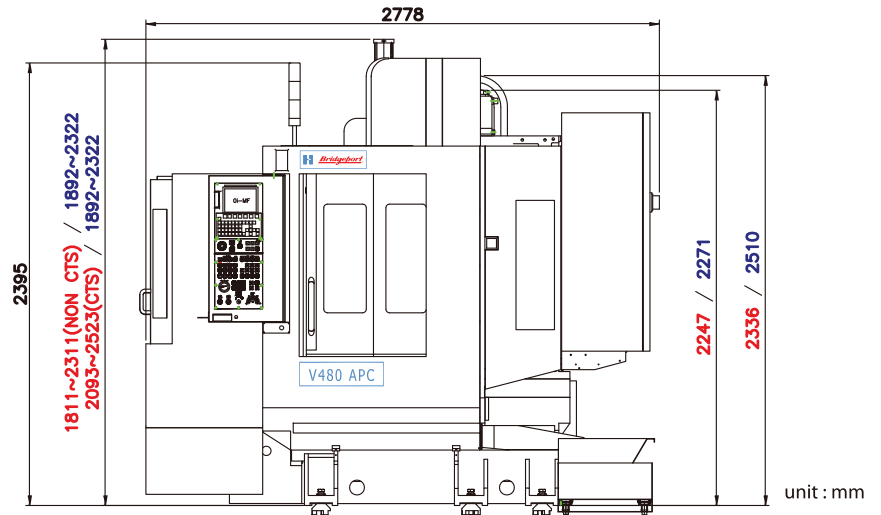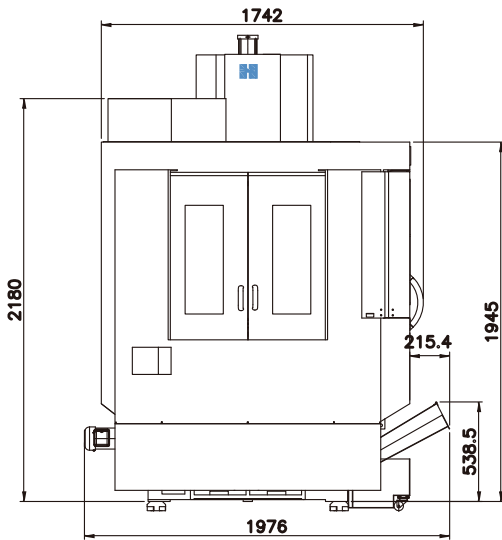

SPINDLE OUT DIAGRAM

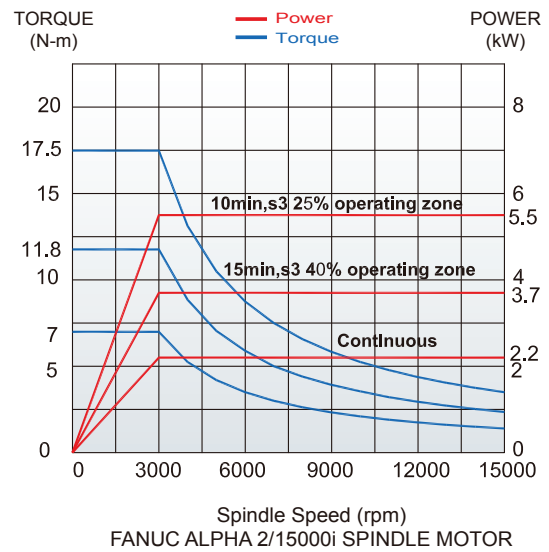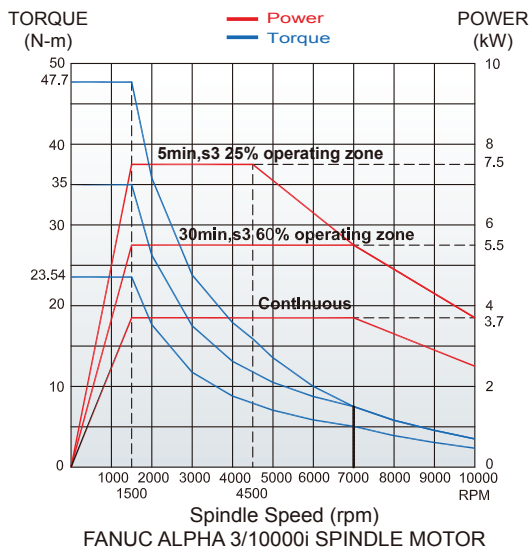


SPECIFICATIONS

Travel	V480 APC		Unit
X x Y x Z	480 x 400 x 430		mm
Spindle Center to Column	429	420	mm
Spindle			
Taper Size	No. 40	No. 30	
Motor Rating (Max.)	10hp / 7.5kW	7.5hp / 5.5kW	kW
Speed (Max.)	10000 Belt	15000 Direct	rpm
Torque (Max.)	47.7	17.5	N-m
Tapping Speed (Max.)	3000	6000	rpm
Ball Screw			
Diameter	32		mm
Feed Rates (All Axes)			
Rapid and Traverse Rates (Max.)	36	48	m/min
Cutting Feed Rates (Max.)	12	15	m/mim
Tool Changer			
Tool Capacity	20 (Swing Arm)		
Tool Selection	Bi-Directional		
Tool Holder Type	BT or CAT or SK or ANSI 40	BT or CAT or SK or ANSI 40	
Tool Diameter Max.	75 (Full) 150 (Adj Pockets Empty)		mm
Tool Length Max.	185		mm
Tool Weight Max.	7	4	kg
Tool Change Time (Avg.)	2.5 (C-C 4.5)	0.8 (C-C 2.2)	sec
Accuracy (ISO 230-2)			
Positioning (All Axes)	0.01		mm
Repeatability	0.005		mm
Motors			
Axis Motor Rating	1.8	1.6 (X, Y) 3 (Z)	kW
Coolant & Flush Motor	0.52		kW
Lubrication			
Spindle Bearing	Grease		
Linear Guideways	Grease		
Ball Screw	Grease		

To keep improvements and developing new functions, Hardinge Taiwan reserves the rights to change specifications without further notice. Due to varying cutting conditions, actual results may be greater or less than those listed

Coolant Capability	V480 APC		Unit
Coolant Tank Capacity	120		liter
Chip Flush Rate	40		liter/min
Miscellaneous			
Compressed Air Req. (Min.)	70 psi, 5 kg/cm ²		
Power Supply Requirement	64A FLA / 220V / 3Phase		
Automatic Pallet Changer (2 Positions, Front Type)			
Model	V480 APC		
Spindle Nose to Table Surface	225-655		mm
Table Length	600		mm
Table Width	400		mm
Table Max. Load (Each Table)	200		kg
Table Tap Holes (Mx x Nos.)	M12 x 35		
APC Change Time	8 ~ 10		sec
APC Change Type (2 Tables)	180° Clockwise or Counter Clock-Clockwise		
Clamping Force	2200 kg @ 35 kg/cm ²		
Max Part Height	400		mm
Options			
Coolant Through Spindle 280 psi (20 bar)			
Chip Flush System			
4th Axis Rotary Tables			
Chip Wash Down Hose			
Coolant Tank Capacity 170 Liter			
12000 rpm Direct Drive Spindle (Taper 40)-(Fanuc & Siemens)			
20000 rpm Direct Drive Spindle (Taper 30)-(Fanuc & Siemens)			
24000 rpm Direct Drive Spindle (Taper 30)-(Siemens)			
Chip Conveyor Auger Type			
Siemens 828D Controller (31A FLA / 400V / 3Phase)			
Linear Scales			
Spindle Oil Chiller			
Tool Probe / Pre-Wiring			
Part Probe / Pre-Wiring			
Ethernet Interface + D/S 256MB Memory Card + AICC (pre-read 40 Blocks)			

HARDINGE WORLDWIDE

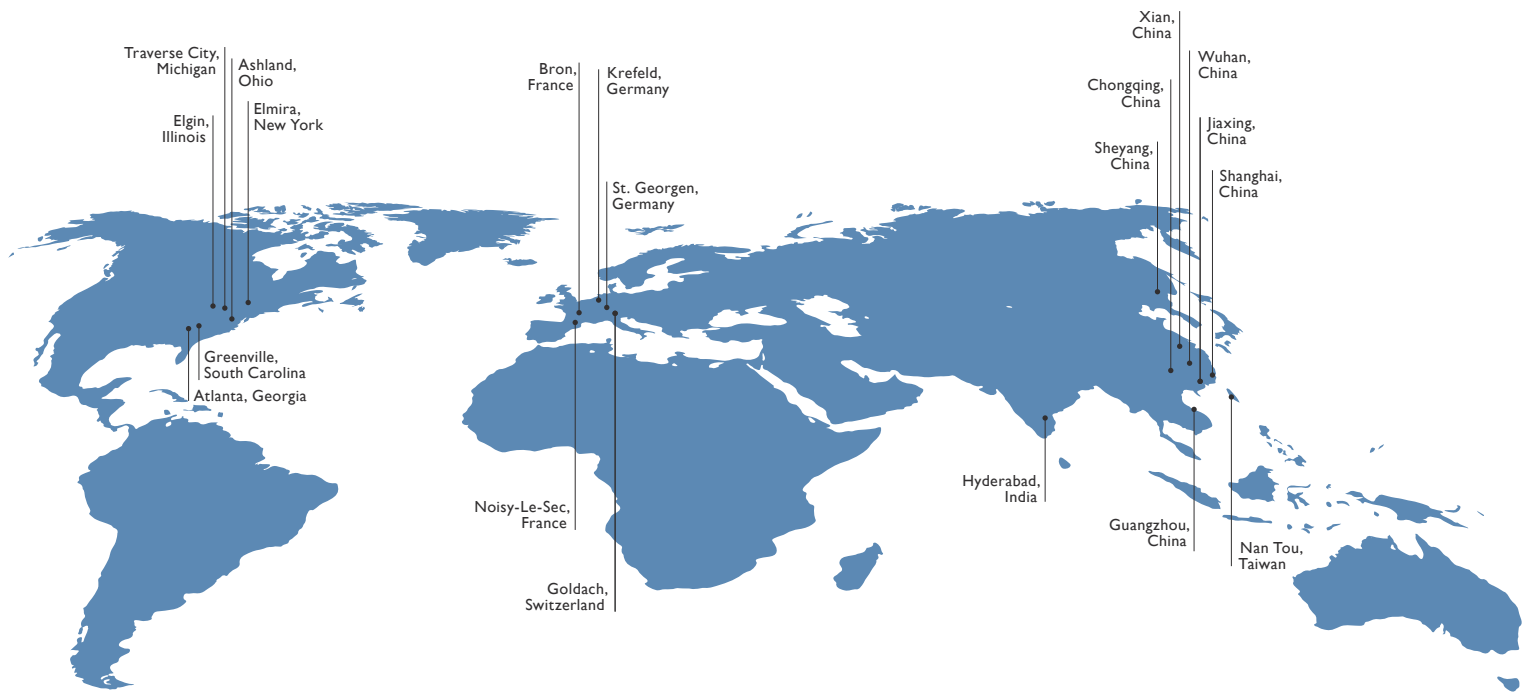

Hardinge is a leading international provider of advanced metal-cutting solutions. We provide a full spectrum of highly reliable CNC turning, milling, grinding, and honing machines as well as technologically advanced workholding accessories.

The diverse products we offer enable us to support a variety of market applications in industries including aerospace, agricultural, automotive, construction, consumer products, defense, energy, medical, technology, transportation and more.

We've developed a strong global presence with manufacturing operations in North America, Europe, and Asia. Hardinge applies its engineering and applications expertise to provide your company with the right machine tool solution and support every time.

AMERICAS

GEORGIA
Hardinge Corporate
79 W Paces Ferry Rd, 2F
Atlanta, GA 30305
P. +800.843.8801

ILLINOIS
Hardinge
1755 Britannia Dr
Unit 1A
Elgin, IL 60124
P. +800.843.8801

MICHIGAN
Forkardt
2155 Traversefield Dr
Traverse City, MI 49686
P. +800.544.3823
E. tcsales@forkardt.com

NEW YORK
Hardinge
1 Hardinge Drive
Elmira, NY 14903
P. +800.843.8801
E. info@hardinge.com

OHIO
Ohio Tool Works
1374 Enterprise Parkway (TR 743)
Ashland, OH 44805
P. +419.281.3700
E. sales@ohiotoolworks.com

EUROPE

SCHWEIZ
Hardinge Kellenberger AG
Thannäckerstrasse 22
CH-9403 Goldach
P. +41 71 2429111
E. info@kellenberger.net

DEUTSCHLAND
Hardinge GmbH
Fichtenhain A 13c
47807 Krefeld
P. +49 2151 496490
E. info@hardinge-gmbh.de

J.G. Weisser Söhne GmbH
Johann-Georg-Weisser-Straße 1
78112 St. Georgen
P. +49 7724 881-0
E. info@weisser-web.com

FRANKREICH
Jones & Shipman SARL
8 Allee des Ginkgos
BP 112-69672
Bron Cedex, France
P. +33 472 812660

ASIA

CHINA
Hardinge Machine
(Shanghai) Co. Ltd.
1388 East Kangqiao Road
Pudong, Shanghai 201319
P. +86 21 3810 8686

TAIWAN
Hardinge Machine Tools
B.V., Taiwan Branch
No.11,Tzu Li 3rd Rd.,
Nantou City, 540 Taiwan
P. +886 49 2260 536
E. cs@hardinge.com.tw